


Product Specification

Model NO: 581121

Name: DNH-1LED-3W 230VAC LED module

(with asymetrics optics)

Version: 1st Edition 2017

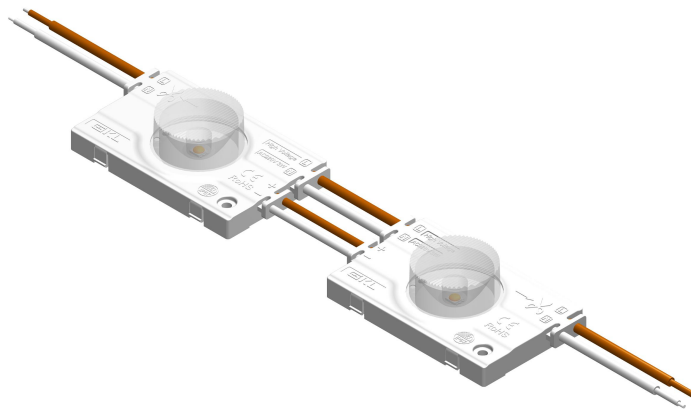

Customer Confirmed	Checked	Approved	Editor

Description:

- 1, Adopt high quality LED as light source,high brightness,uniform lighting,good Antistatic;
- 2, AC200-AC264V 50Hz/60Hz input;P.F>0.9;
- 3, Nice design with 12x50°optical lens;
- 4, Circuit design with constant current, over-temperature and short circuit protection function;
- 5, Use fire-resistant material, fireproof up to U94V-0 and waterproof up to IP67;
- 6, No need power supply; no wiring loss; no voltage-dropping; single cuttable; easy installation;
- 7, Certificate : UL, CE, Rohs, LM80, IP67

Application : Advertising sign with 120-350mm and lighting box etc.

DENCOP LIGHTING spol. s r.o.

Tecovska 1122, Zlin-Malenovice, 76302, Czech Republic

Web: www.dencop.cz ; Email: obchod@dencop.cz ; Tel: +420 571 894 000

Parameters of product:


Voltage:	AC220V-AC240V 50Hz/60Hz	Color:	white
Power:	3W	Material:	PVC
Lumens:	280lm	Weight(50PCS):	880g
Beam angle:	12*50°	Connection Qty:	20pcs/chain/2pcs can be cut/max 100pcs
PF:	>0.9	Fixing Screw:	M3 screw
LED Qty:	2PCS	Tape:	3M backing tape
CCT:	White	Working Temp.:	-20~55°C
Luminous efficacy:	93lm/w	Storage Temp.:	-40~80°C
IP rate:	IP67	Warranty:	4year
Dimensions	75*45*20mm		

Parameters of light source:


LED	SMD LED (LM80)
Life spam	> 50000H
Ra	≥80
CCT	6000K-6500K / 6500K-7000K/7000-7500K

The final interpretation of the product made by DENCOP Lighting all subject to change without notice.

Lighting distribution:

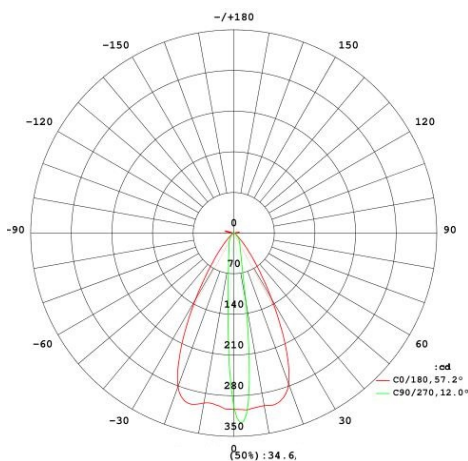

lighting distribution cover

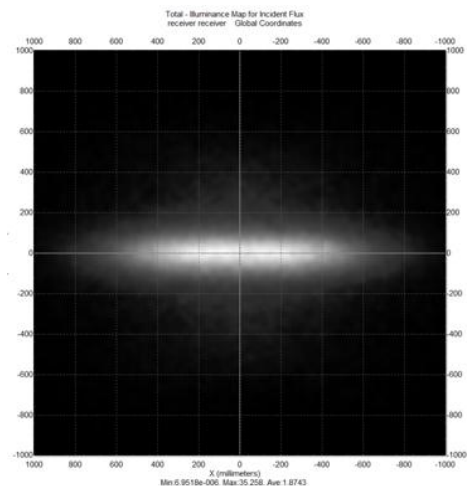


lighting spot

DENCOP LIGHTING spol. s r.o.


Tecovska 1122, Zlin-Malenovice, 76302, Czech Republic

Web: www.dencop.cz ; Email: obchod@dencop.cz ; Tel: +420 571 894 000

Dimension:(Unit: MM):

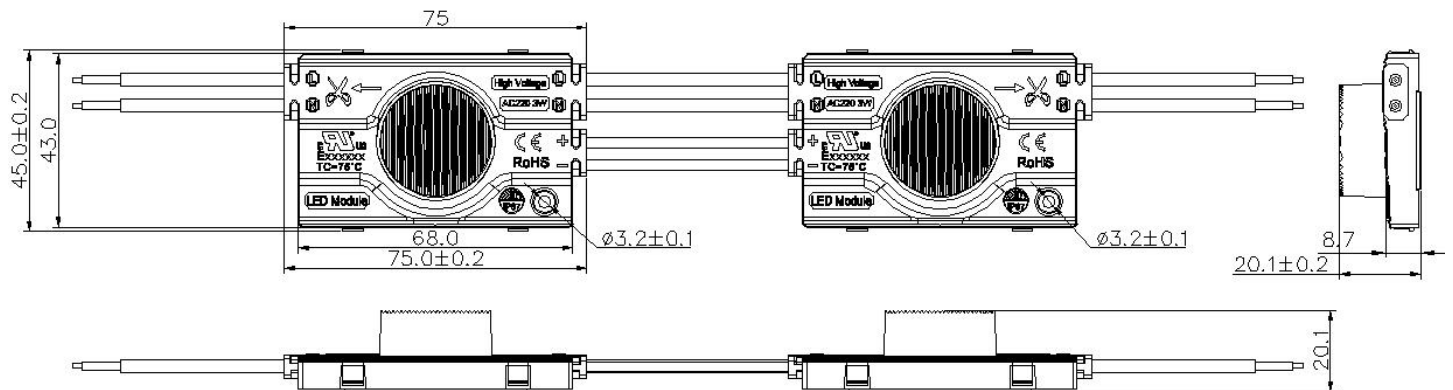

Installation and cable connecting diagram:

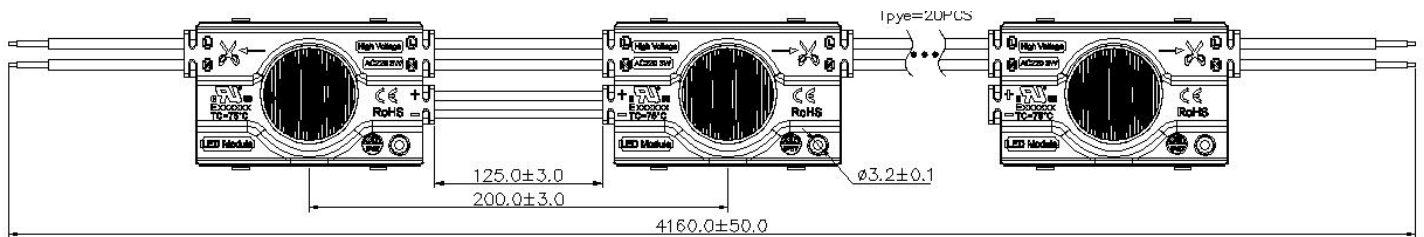

NOTES: Each chain 20pcs total 60W, max 100pcs per chain.

*Note: For more information, please refer to user manual and installation manual at installations